
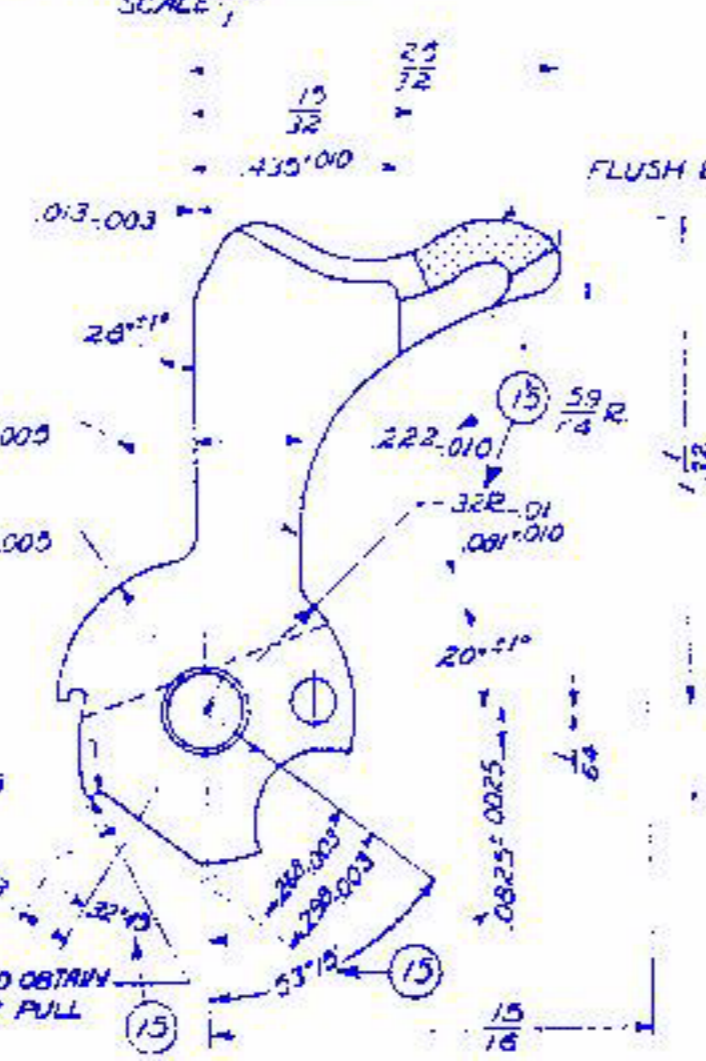
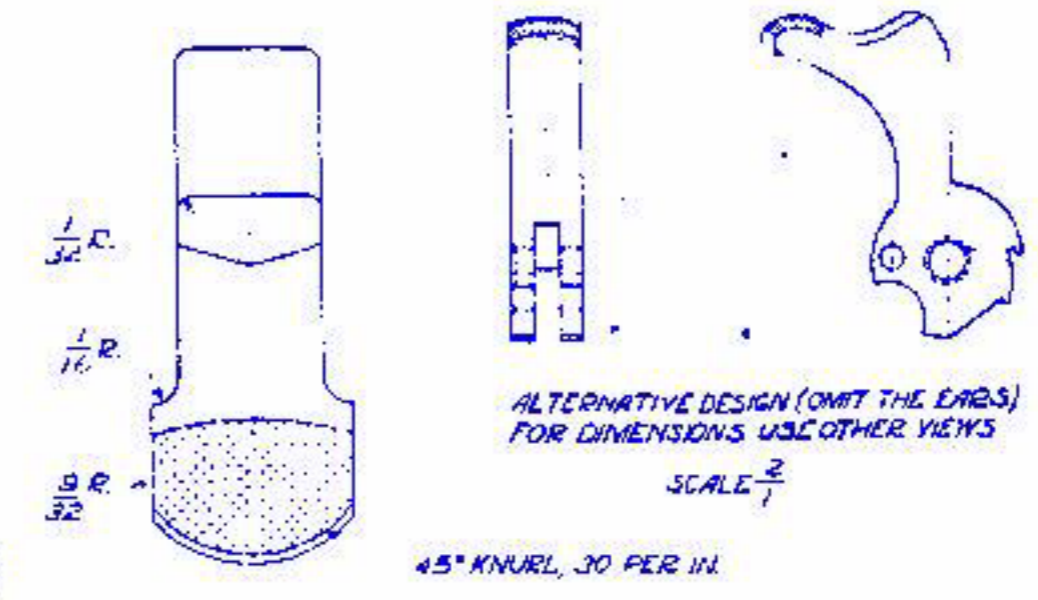


HEAT TREATMENT & FINAL FINISH




PHYSICAL PROPERTIES		MAY 1 1920 REVISIONS	
Y.P.		14	5-11-40
T.S.		15	6-19-40
EL. 2		16	7-16-40
RTD			
RR.			
POCK			

DRG. PERTAINS TO	
42-B	45AH M11/2

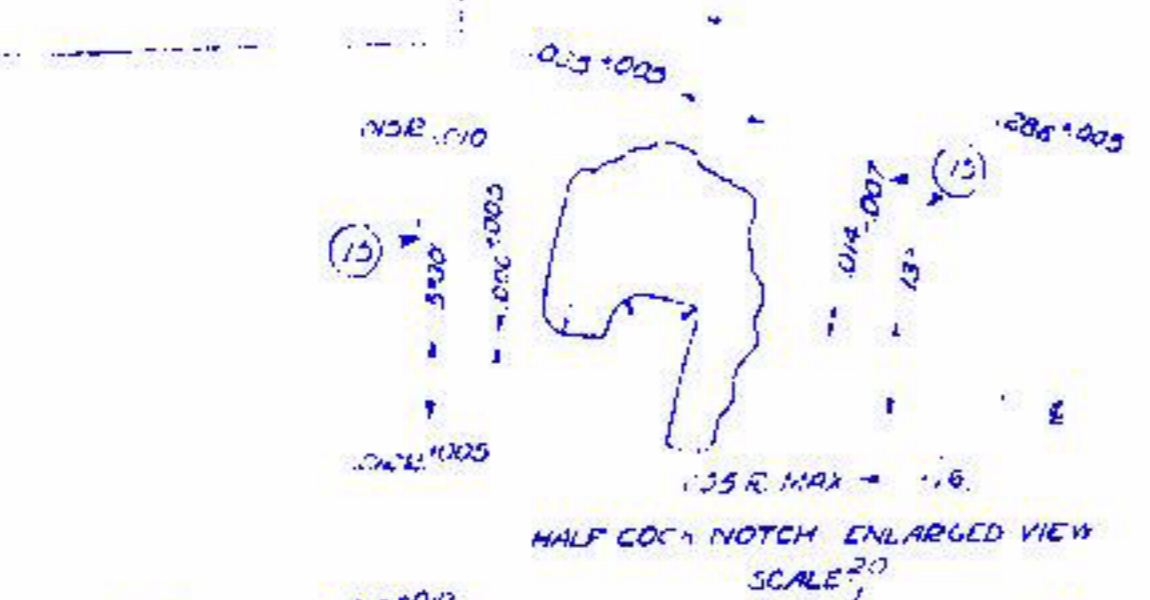

FLUSH BEFORE KNURLING

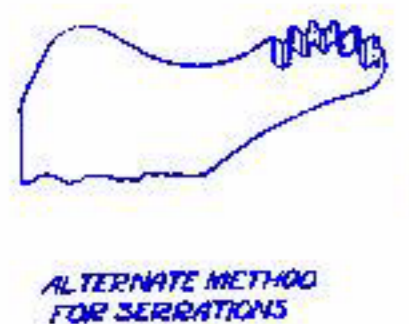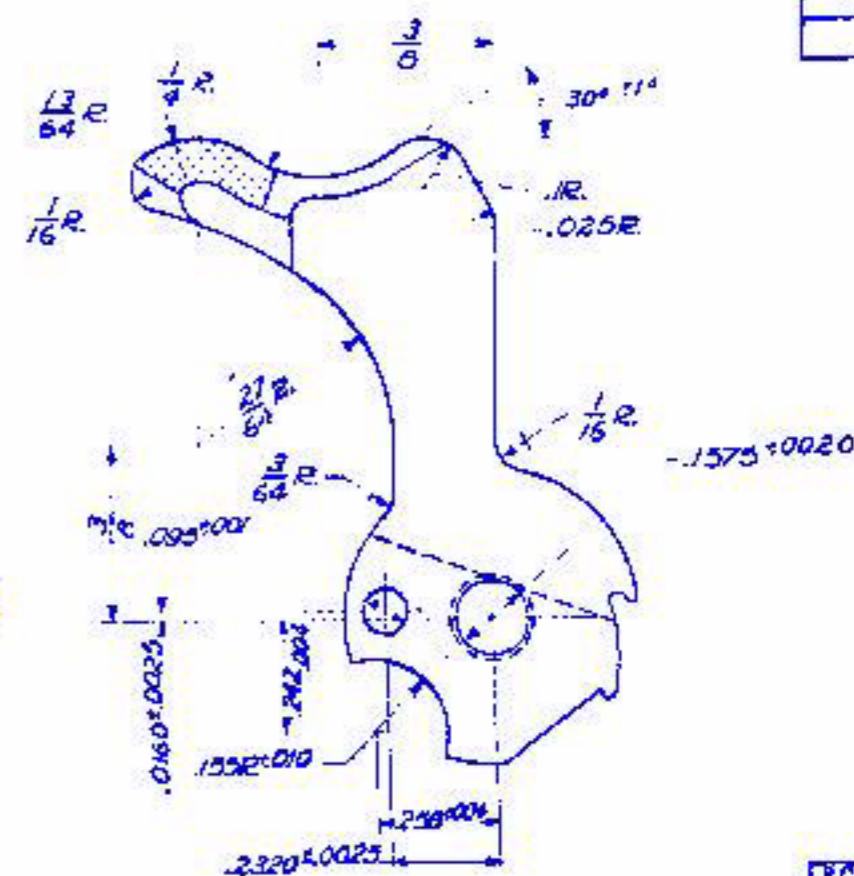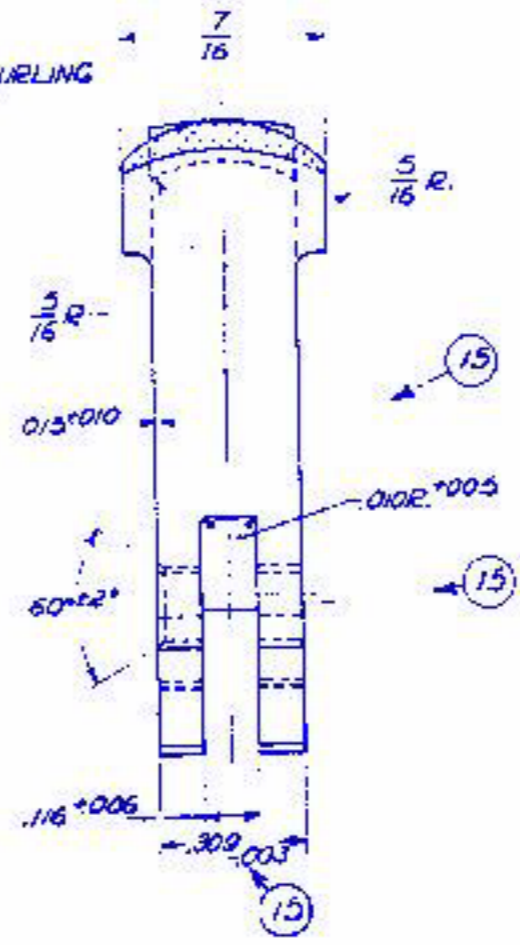

BREAK CORNER TO OBTAIN REQUIRED TRIGGER PULL

HAMMER C3839-16  
FINISH f

DESIGNED	TRACED	LOG OFF
ERC	ERC	CCP
CHECKED	APR	CHIEF OF DIVISION
SUBMITTED:		
Approved by THE CHIEF OF ORDNANCE DEPT. APPROVED BY ORDER OF THE CHIEF OF ORDNANCE [Signature] CHIEF OF ORDNANCE DEPT. ORDNANCE DEPT. U.S.A.		

TOLERANCE  $\pm .01$  ALLOWED ON ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED  
SUPERSEDES OLD TRACING C3839 UNDER REVISION DATE OF MARCH 8, 1944

SCALE  $\frac{4}{1}$  C3839