

HYBRID DEVELOPMENT INTERNATIONAL
RACING INTERCOOLER KIT
INSTALLATION MENU



Please read before continue

Please read through all the instruction and practice all precaution in all aspect of safety and every step prior and during the installation. This installation menu is purely for **HYBRID DEVELOPMENT INTERNATIONAL RACING INTERCOOLER KIT**

and is used as guide only. As different vehicles in different countries may have different specifications and component layout. Therefore, it is important to make sure the connection is properly done by authorized personals or dealers.

Warning

- Check and clean all open area for foreign object inside.
- Installation should only be carried out by authorized dealer or agent only.
- Avoiding water, liquid or fluid during and post installation.
- Do not install the unit in a place that will interface the driver.
- This product is off road only not for public road.
- Never adjust the fitment when the car is moving or on public road ,doing so is dangerous to yourselves and others
- Make sure there is adequate ventilation if you are installing or setting it in door.

LIMITED WARRANTY

Hybrid Development (HK) ltd will warranty for the period of 1 year from original purchase against all defects in workmanship and materials. Hybrid Development (HK) ltd is not responsible for expenses incurred for labor, personal injury or inconvenience. Hybrid Development (HK) ltd sole responsibility is to offer a replacement product or to repair the damaged product. Hybrid Development (HK) ltd cannot warranty products damaged by improper installation. All other products sold by Hybrid Development (HK) ltd are warranted by the original manufactures and is not the responsibility of Hybrid Development (HK) ltd.

All products are for racing use only.


All rights reserved.

For more information please visit www.hybrid-power.com or contact tech@hybrid-power.com


remove the Standard front bar low



remove standard front mount
intercooler and intercooler pipes

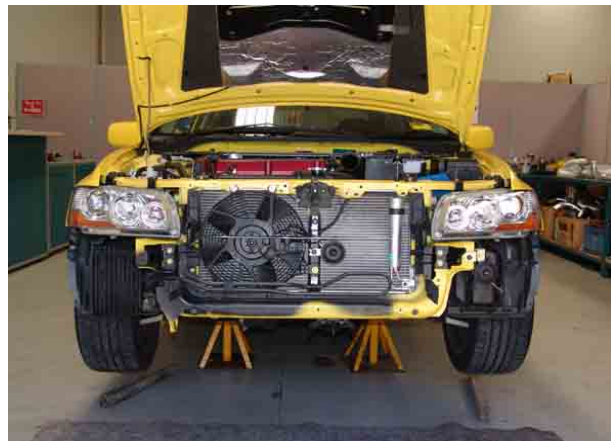

install front hdi bracket
and intercooler lower
bracket.

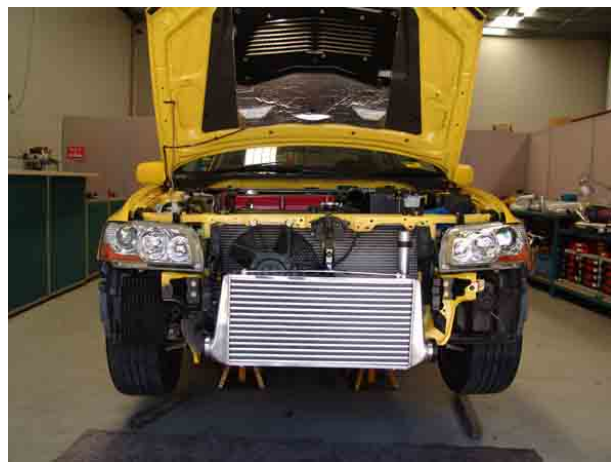

install bottom bracket as shown




connect inlet manifold pipe as shown.
note:
90 degree silicon joiner is optional.



install lower cold pipe



connect hdi hot pipe to the intercooler, do not tighten it.

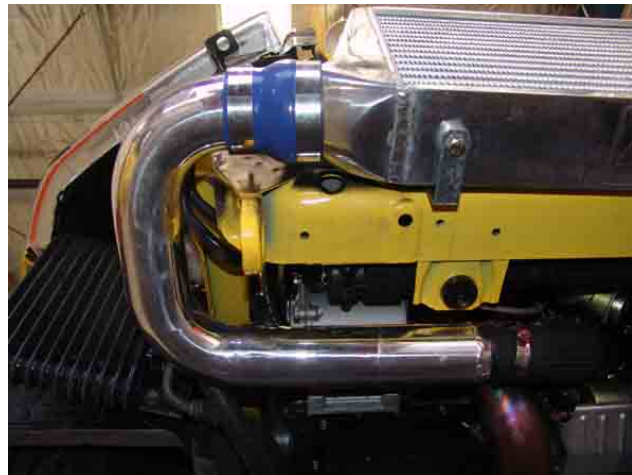

Trim front bar for perfect fitment

